

starQuick®

Introducing two new starQuick® accessories! Upon customer request!

starQuick® Universal Rail Adaptor


For BIS RapidStrut® and other brands of Strut rail



1) Click two pieces together



2) Join Clamp with Adaptor



3) Place Adaptor in rail



4) Turn 1/4, Clamp ready to use

- Innovative solution for fixing starQuick® clamps to Strut or BIS RapidRail®
- Add pipework quickly and easily to any existing installation
- Resistant to UV, aging, oil and gasoline
- No corrosion, recyclable and halogen free
- For starQuick® clamp SQ-10 to SQ-51

For BIS RapidRail®



1) Join Clamp with Adaptor




2) Place Adaptor in rail




3) Turn 1/4, Clamp ready to use


starQuick® Threaded Rod Adaptor



- Innovative solution for fixing starQuick® clamps to threaded rod
- Add pipework quickly and easily to any existing installation
- Resistant to UV, aging, oil and gasoline
- No corrosion, recyclable and halogen free
- For starQuick® clamp SQ-10 to SQ-51



1) Place Rod Adaptor

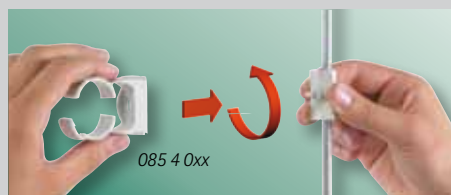

2) Join Clamp with Adaptor



3) Clamp ready for use



starQuick®

starQuick®, quick and easy as 1,2,3



1) Wall mounted clamp



2) Place pipe into clamp



3) Push to fix and lock pipe into clamp

starQuick® Clamps



Part No.	Type	Nominal pipe size		OD range mm	Fa,z (lbs)	Fb,z (lbs)	Box	Outer Box
		IP	CT					
085 4 010	SQ-10	-	1/4"	10 - 12	170	500	100	1.200
085 4 012	SQ-12	1/4"	3/8"	12 - 14	180	550	100	1.200
085 4 015	SQ-15	-	1/2"	14 - 16	200	600	100	1.200
085 4 018	SQ-17	3/8"	5/8"	16 - 20	230	700	100	800
085 4 022	SQ-20	1/2"	3/4"	20 - 23	270	800	50	600
085 4 028	SQ-25	3/4"	-	24 - 28	280	850	50	600
085 4 031	SQ-28	-	1"	28 - 32	300	900	50	400
085 4 035	SQ-32	1"	1 1/4"	32 - 35	330	1.000	50	400
085 4 038	SQ-36	-	-	35 - 40	370	1.100	25	300
085 4 042	SQ-40	1 1/4"	1 1/2"	40 - 44	400	1.200	25	200
085 4 050	SQ-47	-	-	44 - 50	430	1.300	25	200
085 4 054	SQ-51	1 1/2"	2"	48 - 55	470	1.400	15	180
085 4 063	SQ-59	2"	-	59 - 65	500	1.500	15	180

Fa = maximum allowed load. Fb = breaking load.

starQuick® Accessories



	Part No.	Product	Dimension
A	085 4 359	Threaded Rod Adaptor	3/8"
B	085 4 332	Universal Rail Adaptor	Strut + RapidRail®
C	085 4 000	Duo-wall Plate	2"
D	085 4 302	Sprint Screw	Ø 1/4" x 1.8"
E	085 4 316	Rail	6"
	085 4 325	Rail	3'3"
F	085 4 313	Rail Adaptor	starQuick® rail
G	085 4 314	Rail Plug	1.2"
H	085 4 331	Strut Adaptor	Strut-rail
I	610 1 063	Push Plug	1/4"
J	SQ 085 4 006	Fixing Nut	1/4"
K	SQ 085 4 337	Hammerfix 1/4"	WMO, 15, 2, 30

North America

Raywal North America Inc.

48893 West Road
Wixom, MI 48393
Toll free (877) RAYWAL9

Main (248) 374 3100
Fax (248) 374 3232
info@raywal-usa.com

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE)
Grenoble (FR) · Banbury (GB) · Madrid (ES)
Mladá Boleslav (CZ) · Kraków (PL) · Kyiv (UA)
Moscow (RU) · Wixom - Detroit (US)